




The Future of Cement Board

TECHNICAL DATASHEET

SECOLITE® Screws **PN**

4.2 mm X 40 mm

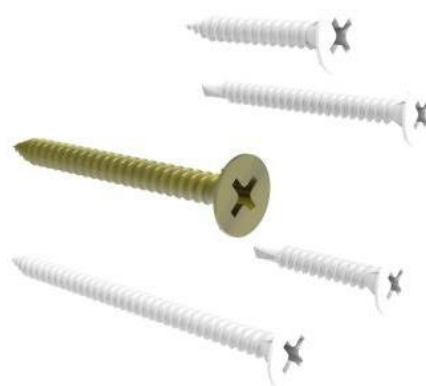

Cofinanciado por:



UNIÃO EUROPEIA
Fundos Europeus
Estruturais e de Investimento




Product Description and Intended Use

Secolite® Screws PN are alkali resistant mechanical fasteners that are ideal for fixing Secolite® Cement Boards to light steel and wood framing.

Technical Description

Base Material:	Carbon Steel C-1022	Screw Drive:	Phillips
Coating Material:	Yellow Zinc	Thread:	Medium
Head Type:	Big Wafer	Point:	Nail
Torque (kg-cm):	≥ 45	Surface Hardness (HV):	600
Hardened Depth (mm):	0.15 – 0.23	Core Hardness (HV)	320 - 425

Harmonized Technical Description: EN 14566:2008+A1:2009

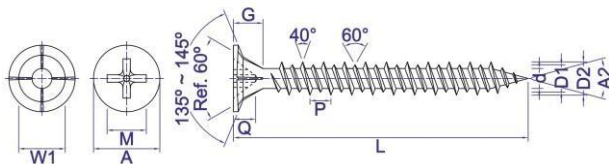

Mechanical Description

Parameter	A	M	G	W1	Q	P	D1	D2	d	A2	L
Value min. (mm)	8.50	Ref.	Ref.	Mini	2.80		3.50	4.10	2.60	25°	40
Value max. (mm)	9.50	5.32	4.00	6.30	3.20	2.84	3.70	4.50	2.70	35°	+0, -1.27

Packaging

500 pcs/box, 12 boxes/pack, 24 packs/pallet.

Storage and Handling

Store flat in a clean and dry environment. The use of protective gloves is recommended.

Note: All technical data was compiled from information provided by the supplier.