




The Future of Cement Board

TECHNICAL DATASHEET

SECOLITE® Screws **SD**

3.9 mm X 40 mm

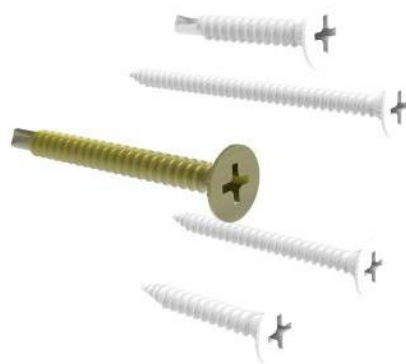

Cofinanciado por:



UNIÃO EUROPEIA
Fundos Europeus
Estruturais e de Investimento




Product Description and Intended Use

Secolite® Screws SD are alkali resistant mechanical fasteners that are ideal for fixing Secolite® Cement Boards to light steel framing.

Technical Description

Base Material:	Carbon Steel C-1022	Screw Drive:	Phillips
Coating Material:	Yellow Zinc	Thread:	Fine
Head Type:	Big Wafer	Point:	Drilling
Torque (kg-cm):	---	Surface Hardness (HV):	580 - 780
Hardened Depth (mm):	0.15 – 0.28	Core Hardness (HV)	325 - 425

Harmonized Technical Description: EN 14566:2008+A1:2009

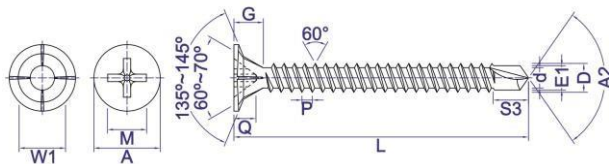

Mechanical Description

Parameter	A	M	G	W1	Q	d	D	P	E1	A2	S3	L
Value min. (mm)	8.50	Ref.	Ref.	Mini	2.80	2.65	3.73		3.20	100°	4.50	40°
Value max. (mm)	9.50	5.25	3.95	6.55	3.20	2.75	3.91	1.41	3.30	110°	4.80	+0, -1.00

Packaging

250 pcs/box, 24 boxes/pack, 24 packs/pallet.

Storage and Handling

Store flat in a clean and dry environment. The use of protective gloves is recommended.

Note: All technical data was compiled from information provided by the supplier.